



ATA TRADE LLC.

ATA TRADE, LLC is dedicated to being the most valued supplier of specialty construction materials honoring a tradition of providing QUALITY products, exceptional SERVICE, and trusted INTEGRITY.





ATA TRADE LLC.

ATA TRADE , LLC. manufactures, and markets high quality building materials for today's construction professionals.

Products are sold through our authorized distribution network.

We're a family-owned and operated company focusing on product quality, outstanding service, and business integrity since our founding .

We remain committed to marketing high quality products and systems that meet or exceed the latest regulations. From highway construction and repair, building construction and restoration, to waterproofing/vapor proofing/air barrier products and more, we've been satisfying the needs of the public and private sector of the building construction industry for over .

ATA TRADE, LLC

222 W 6th St,
San Pedro, CA 90731,
UNITED STATES OF AMERICA

+1 (562) 719-1264

info@atatraddllc.com

www.atatraddllc.com


FACT: Uncontrolled air leakage through the building envelope will affect the performance of the building materials within the wall assembly.

Not only do major investments in buildings deserve the very best protection available today, air barriers are now required in all new federal construction.

- Indoor air quality issues
- Inflated energy costs
- Mold growth
- Efflorescence
- Degradation of building components

Make an energy-saving difference!

With the rising concern over energy consumption and the greenhouse effect, a complete AIR-SHIELD air and air/vapor barrier system can provide all the components needed for making your building more energy efficient while combating indoor air quality issues.

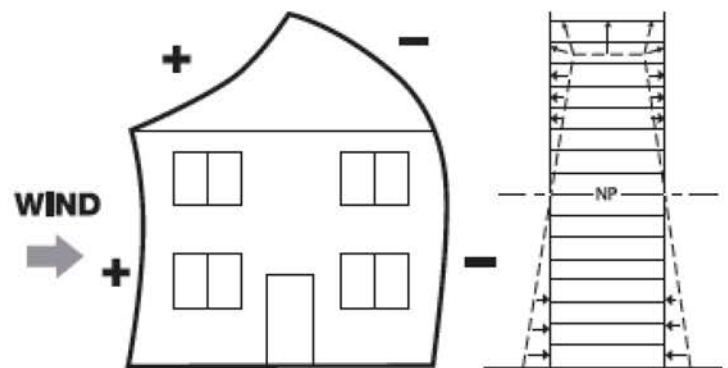

How does air move through my building?

Air will move through the building if there is a pressure difference across the building envelope. As a result, any hole or penetration in the building envelope can allow moisture-laden air to move through the wall.

Air is moved by:

- Building location and wind
- Stack (or chimney) effect
- Mechanical means (HVAC systems)

IDEAL APPLICATIONS FOR AIR-SHIELD

- Cavity walls
- Masonry walls
- Precast concrete
- Cast-in-place concrete
- Interior and exterior gypsum board
- Styrofoam
- Primed steel
- Drywall
- Plywood



ATA TRADE LLC.

The complete line of AIR-SHIELD air barrier products is formulated to meet current specifications and regulations set forth by agencies such as the Air Barrier Association of America (ABAA), ASTM International, and the National Fire Protection Association (NFPA).

In addition, significant changes in the International Building Code (IBC), International Energy Conservation Code (IECC), and ASHRAE 90.1 now require the design of buildings to

not only have increased thermal efficiency with the use of continued insulation, but also require the use of a complete air barrier system to address air leakage. AIR-SHIELD materials are designed and tested to meet the requirements of these current codes and standards.




University of Michigan
Ann Arbor

Designed and developed
to work together as
a complete air and air
vapor barrier system.




ATA TRADE LLC.

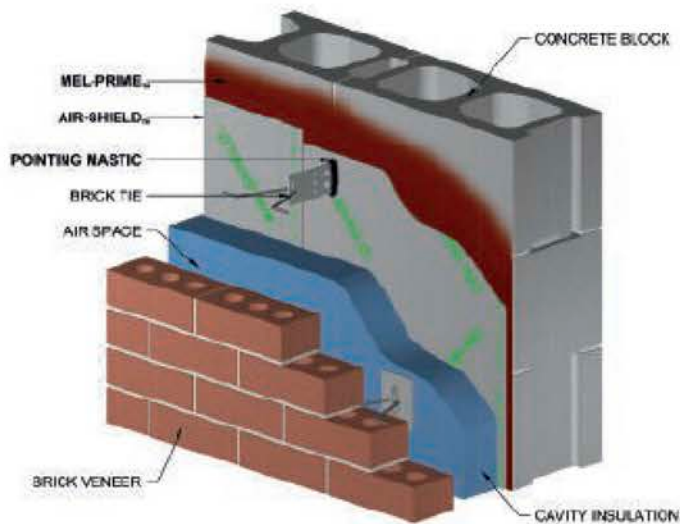


AIR-SHIELD

self-adhering air/vapor and liquid moisture barrier is a part of a total system to complete the building envelope. It is a roll-type product that is nominally 40 mils thick. This unique, self-adhesive membrane, protected by a special release paper, is strong and durable. It remains flexible when surface mounted and will adhere to most primed surfaces at minimum temperatures of 40° F (4° C). [A low temperature version for applications between 20° F (-7° C) and 60° F (16° C) is also available.]

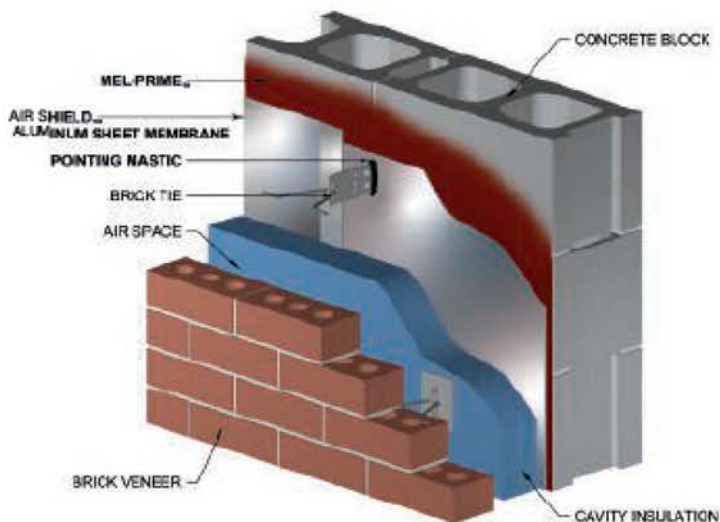

AIR-SHIELD ALUMINUM SHEET MEMBRANE

self-adhering air/vapor and liquid moisture barrier is a roll-type product that is nominally 40 mils thick. The membrane's controlled thickness is fabricated from aluminum bonded to specially modified asphalt.

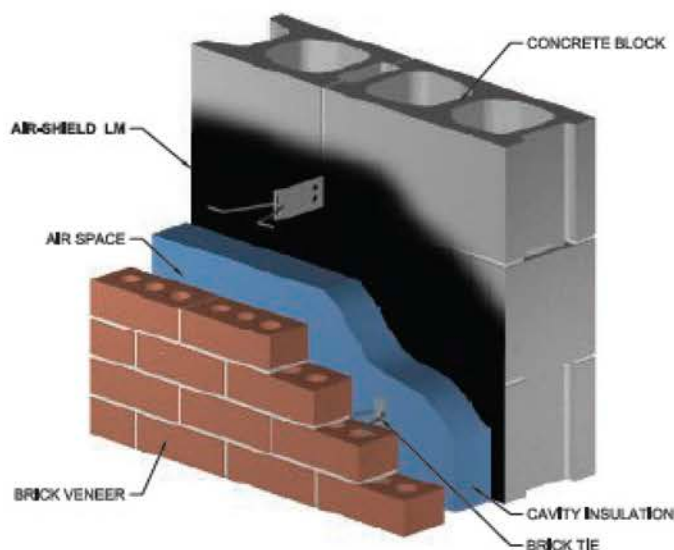


AIR-SHIELD LM

is a liquid applied, water-based, polymer-modified air/vapor and liquid moisture barrier. AIR-SHIELD LM cures to form a tough, seamless, elastomeric membrane, which exhibits excellent resistance to air and moisture transmission. An all-season version is available for use in lower temps.




ATA TRADE LLC.

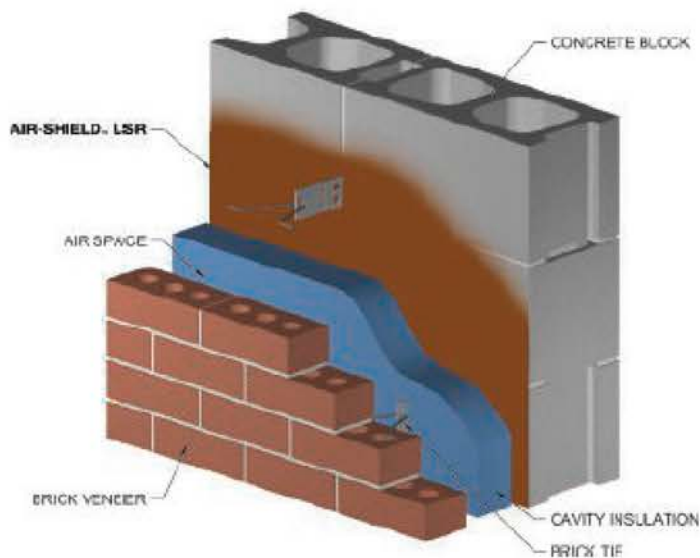


AIR-SHIELD LSR

(liquid synthetic rubber) is an asphalt-free, single-component, synthetic rubber based liquid air/vapor and liquid moisture barrier. AIR-SHIELD LSR cures to form a tough, seamless, elastomeric membrane, which exhibits excellent resistance to air and moisture transmission.

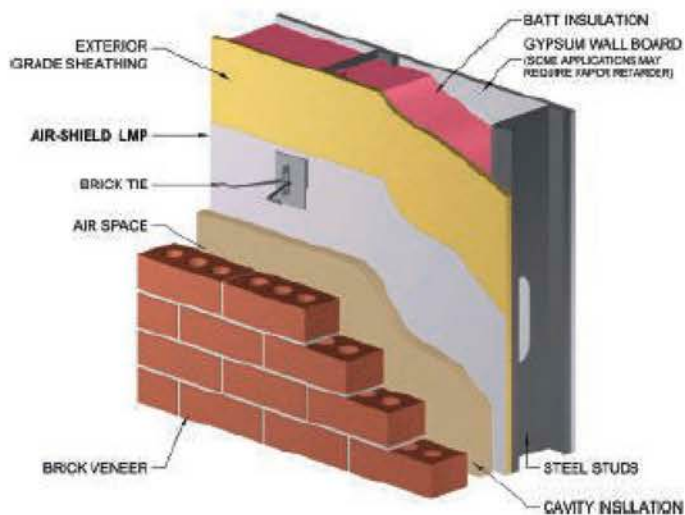

AIR-SHIELD LMP

is also a single component, liquid applied, vapor permeable air/liquid moisture barrier. AIR-SHIELD LMP stops the movement of air, while at the same time, allowing the passage of vapor. The product is designed for wall assemblies that need a vapor permeable air barrier.

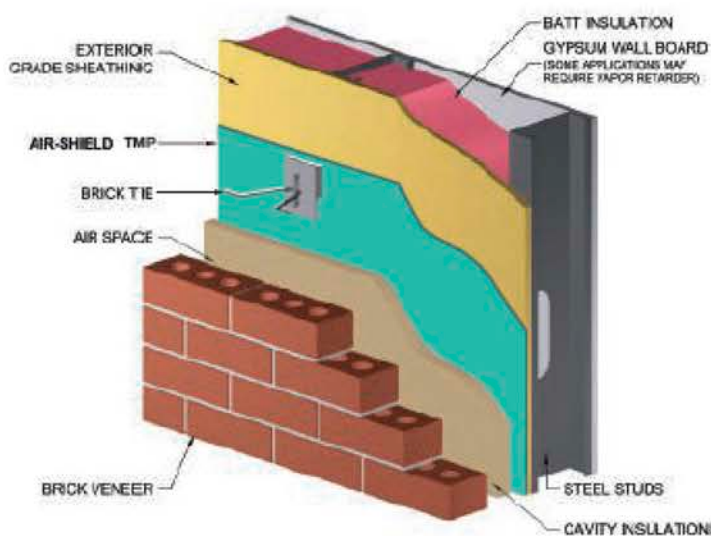


AIR SHIELD TMP

is a water-based air/liquid moisture barrier that cures to form a tough, seamless, elastomeric membrane. When properly applied as a drainage plane, AIR-SHIELD TMP allows vapor to pass through; provides excellent resistance to air leakage; while prohibiting liquid water intrusion into the substrate. AIR-SHIELD TMP is suitable for both new construction and retrofit applications and may be applied to most common surfaces and integrated into various wall systems.




ATA TRADE LLC.

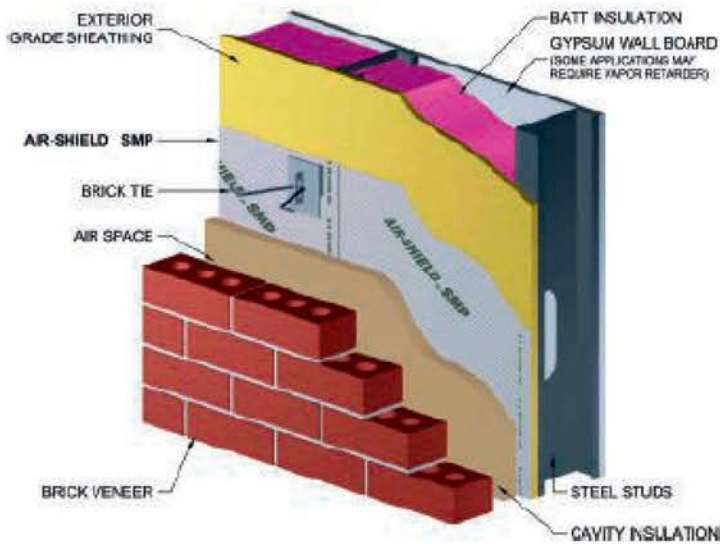

AIR SHIELD SMP

is a self-adhesive, vapor permeable, air/liquid moisture barrier that is designed to be fully bonded to the substrate without the use of an adhesive or primer. AIR-SHIELD SMP is a tough, durable membrane that exhibits excellent resistance to air leakage and liquid water intrusion, while at the same time allow vapor to readily pass through to allow the wall assembly to dry.

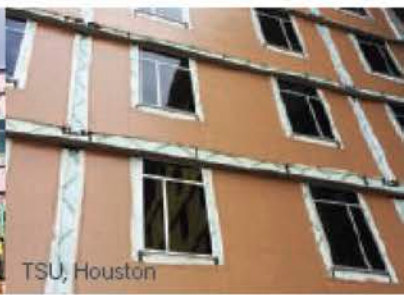

ACCESSORIES



MEL-PRIME™

MEL-PRIME is a solvent-based, ready-to-use adhesive for membrane systems. Formulations available are solvent-based, water-based.



AIR-SHIELD LIQUID FLASHING

AIR-SHIELD LIQUID FLASHING is a high-quality, gun grade, low-odor, elastomeric, polyether, liquid-applied flashing and detailing membrane. It bonds to most construction materials, such as aluminum, brick, concrete, wood, vinyl, and exterior gypsum board.



ATA TRADE LLC.



AIR-SHIELD ALUMINUM FLASHING

AIR-SHIELD ALUMINUM FLASHING provides protection against water infiltration in critical detail areas, such as window and door openings, deck-to-wall intersections, corner boards, wall-to-wall tie-ins, foundation sill plates, sheathing panel seams, under stucco finishes, masonry walls, and other non-roof detail areas. Suitable substrate types are wood, concrete, concrete masonry units (CMU), and exterior gypsum sheathing.



AIR-SHIELD THRU-WALL FLASHING

AIR-SHIELD THRU-WALL FLASHING is a self-adhering, flexible membrane flashing. It is a roll-type product that is nominally 40 mils thick. This material is an air, vapor, and liquid moisture barrier.



AIR-SHIELD BUTYL FLASHING

AIR-SHIELD BUTYL FLASHING is a primerless, composite membrane that is comprised of a black woven polyethylene facer and easy-to-release

kraft paper release liner. The product is designed for extreme cold applications down to 10° F (-12° C). It can be used as a flashing for rough openings, windows, detailing, and as a transition membrane. This material is an air, vapor, and liquid moisture barrier.



POINTING MASTIC

POINTING MASTIC is a pre-mixed, cold-applied, polymeric, single-component sealing compound. POINTING MASTIC was specifically designed to seal all exterior, vertical, and horizontal terminations. POINTING MASTIC can be used on all patches and overlaps in detail areas. Once applied, it provides excellent adhesive and bonding strengths. POINTING MASTIC cures to form a tough, flexible membrane.



BEM

BEM is a one-component, cold-applied, non-slump waterproofing material that can be used for a variety of applications with building envelope products from BEM cures to form a tough, flexible waterproofing membrane. BEM is a high quality moisture curing elastomeric waterproofing and sealing material.



ATA TRADE LLC.

GALLERY



REFERENCES



ATA TRADE LLC.